


# Installation Guide



Take the bike clamp and position it on your handlebar. Place the clamp so the rubber band is facing towards you ( to the side where the bike seat is). Then put your cable tie under the band before you tighten and lock it.


After you position your clamp and cable tie, tighten the rubber band around the handlebar. The band should fit various sizes of handlebars, but try to tighten it so the clamp barely moves. The holes on the rubber band go to locking barb on the other side (little pointy thing).

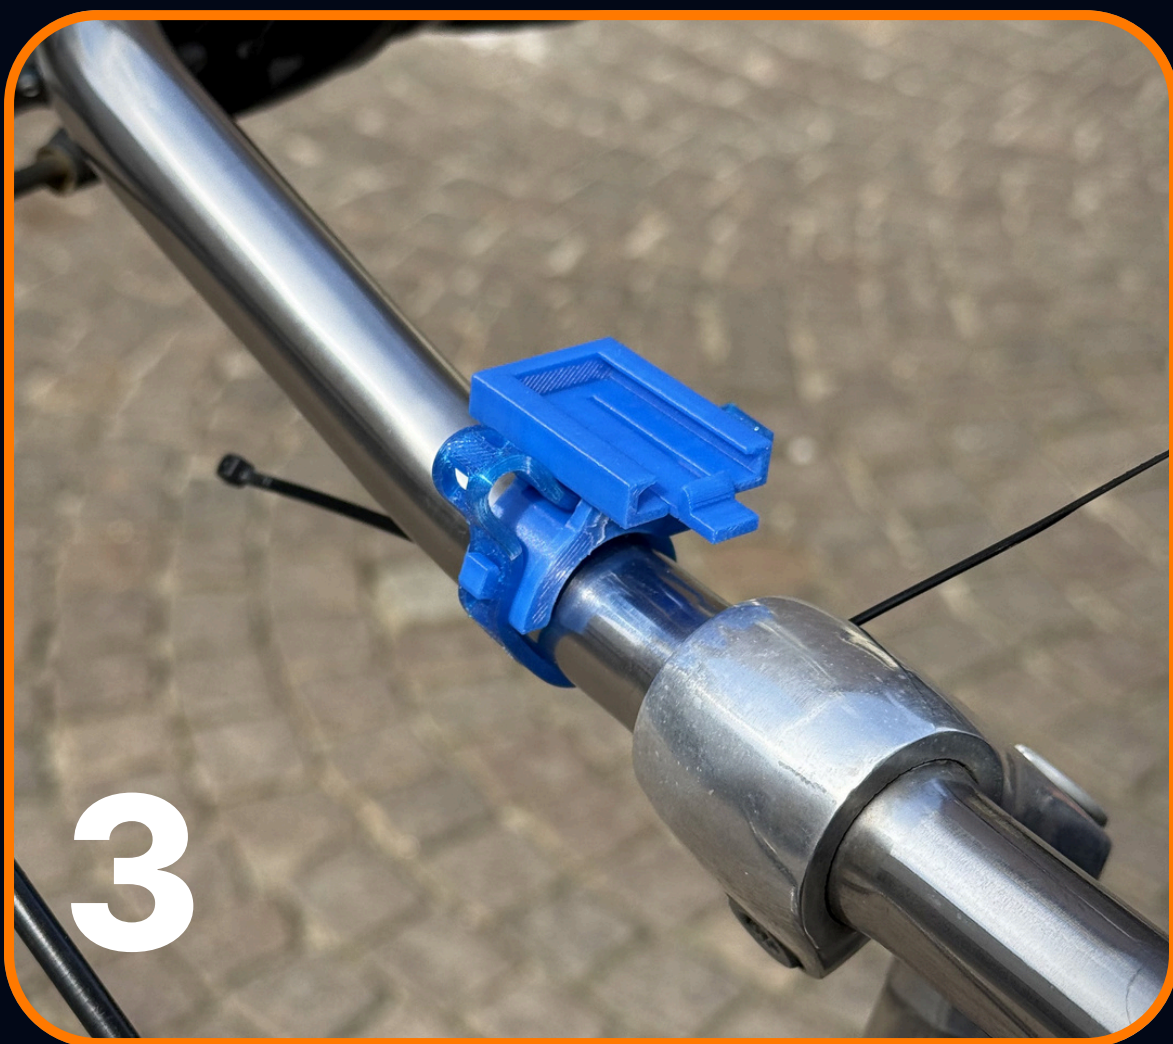

When you have your clamp securely locked onto your handlebar, push the rubber band through the hole under the clicking mechanism on the clamp.

\*Disclaimer: The clamp should hold steadily on any bike handlebar but if you ride through ruggy, or uneven road it can slightly move - just push it back to your desired angle.

Now tighten the cable tie around the rubber band. Sometimes this is not needed, it depends how much rubber band sticks out of the hole on the other side (depends on thickness of your handlebar). If you think it's too long, just bend it around the clamp and as explained tighten with a cable tie. Then cut the cable tie with any scissors.

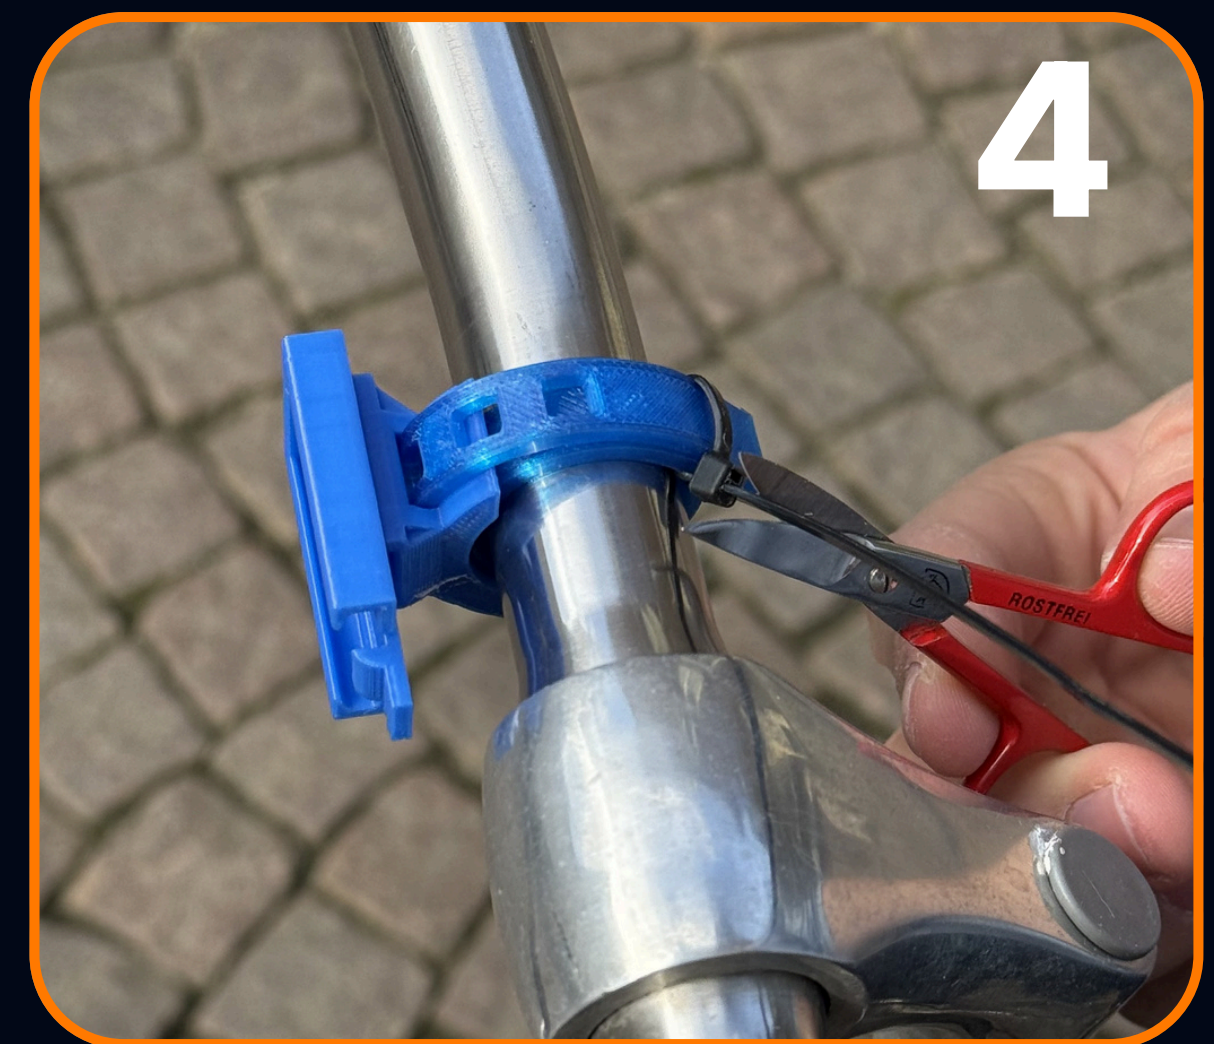

Now you have your clamp set up for your BajkBuddy. (Read "Bike Buddy").

Each Buddy can be freely removed when you slightly push the locking lever in the middle. Don't apply too much force or you risk damage to the lever. It works just fine with a little push with one finger.

To clarify, for inserting buddy into the clamp, you just need to align it with the right side. (either marked on the Buddy's mouting piece or you can look for enclosure from behind - rotate the Buddy upside down to see). Mechanisim locks by itself.

To remove Buddy just do a little downward push on the lever and pull Buddy out. That's it ! Change it how many times you want

